



Windows with geared handle




Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1




Carrier
6-30984-00-0-1
Locking plate
6-30959-**-0-1

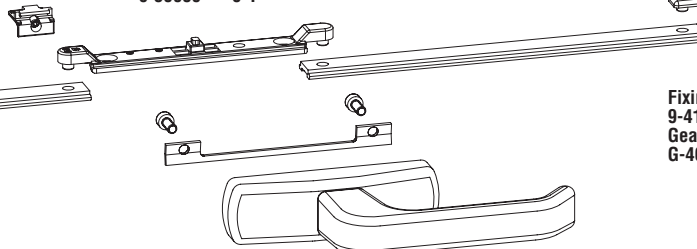

Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1




Fixing plate
9-41506-00-0-8
Geared handle SPACIO
G-46551-96-0-*




Fitting requirements according to size of sashes

Quantity	Description	PU	Article No.
1	Geared handle SPACIO [1] hole centre distance 104 mm – with screws	10	G-46551-96-0-*
1	Fixing plate hole centre distance 104 mm	50	9-41506-00-0-8
1	Carrier	100	6-30984-00-0-1
2	Locking pin element	100	6-24539-00-0-1
3	Locking plate alternatively for + 0,7 mm gasket pressure	100	6-30959-00-0-1
	Locking plate	100	6-30959-01-0-1
2	Bag of limiting stay with friction slider Stay arm length mm Frame groove		
	150 14/18	1	G-12952-14-0-1
	250 14/18	1	G-12953-14-0-1
	alternatively:		
	150 12/15	1	G-12952-12-0-1
	250 12/15	1	G-12953-12-0-1
	150 10/14	1	G-12952-10-0-1
	250 10/14	1	G-12953-10-0-1

[1] * = Colour: 0 = uncoated, 1 = F 1/EV 1, 5 = UC 5, 6 = black (RAL 9005),
7 = white (RAL 9016), 7T = white (RAL 9010)

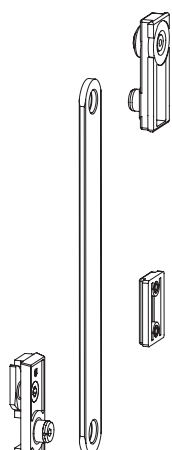

Limiting stay with
friction slider
Stay arm length 150 mm
G-12952-**-0-1
Stay arm length 250 mm
G-12953-**-0-1

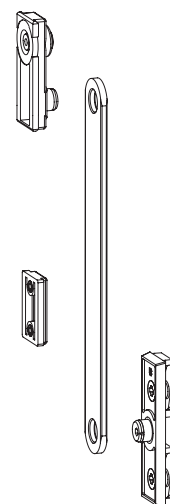

Limiting stay with
friction slider
Stay arm length 150 mm
G-12952-**-0-1
Stay arm length 250 mm
G-12953-**-0-1